



P3.076 Outdoor SMD1415 640x640mm Die-Cast Aluminum Rental LED Display

Model No.: **P3.076-OR13S-SMD1415-104x52-L640xH640**


| Module Parameter | |
|-------------------------|-------------------------------|
| Pixel Pitch | 3.076mm |
| Pixel Configuration | SMD1415 |
| Density | 105,688 pixels/m ² |
| Module Resolution | 104pixel(L) * 52pixel(H) |
| Module Dimension | 320mm(L) * 160mm(H) * 18mm(D) |
| Driving Mode | Constant current, 1/13 duty |

Module Photo

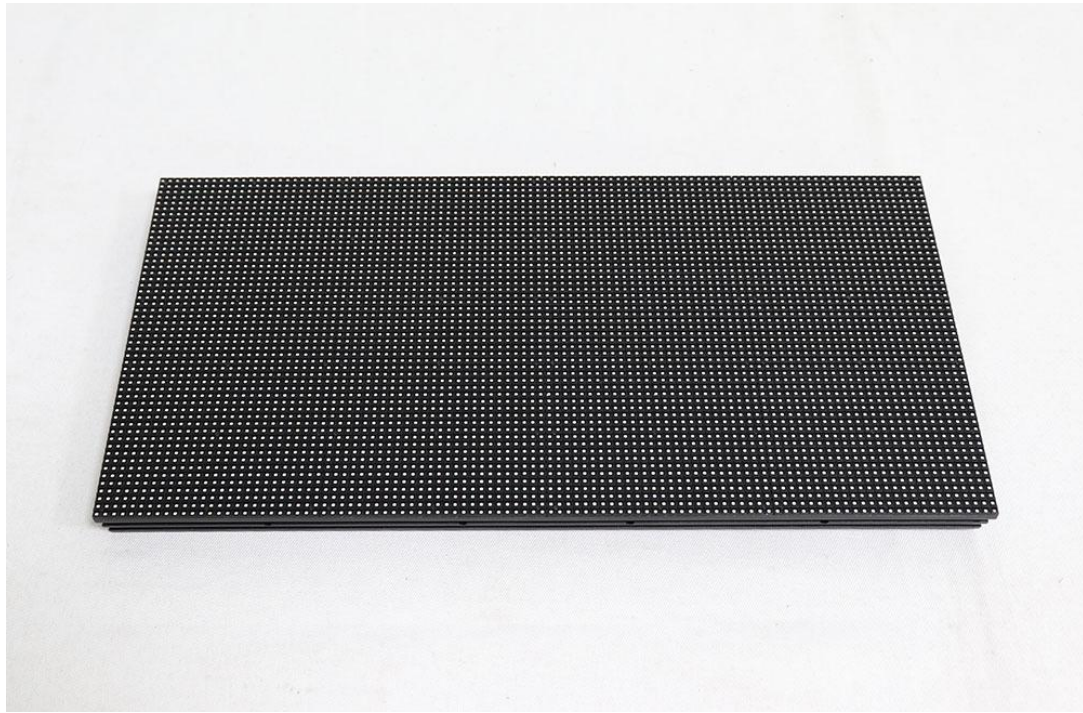

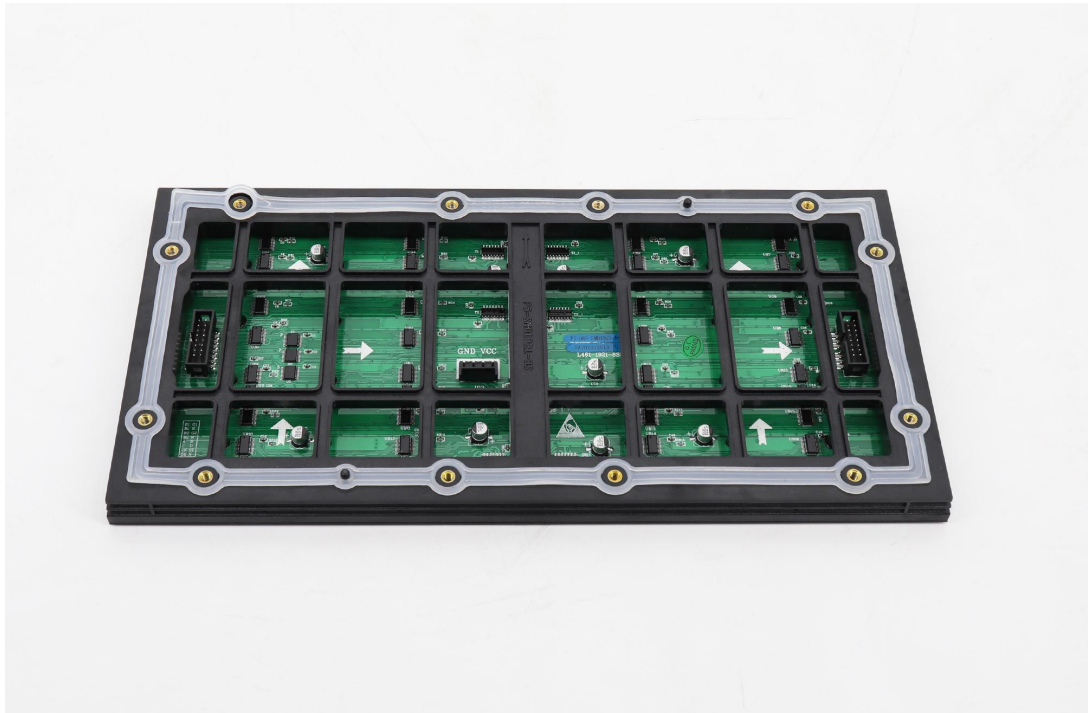

LED Cabinet

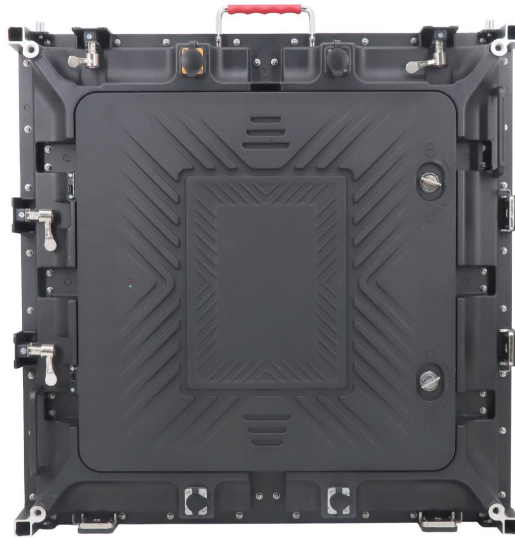

| | |
|------------------------------|---------------------------|
| Module Quantity in a Cabinet | 2(L) *4(H) |
| Cabinet Dimension | 640(L) * 640(H) * 90(D)mm |
| Cabinet Resolution | 208(L) * 208(H) |
| Cabinet Material | Die-Cast Aluminum |
| Cabinet Weight | ≈12KG |

Tel: +86-755-23190947

Website: <https://www.eagerled.com>

E-mail: manager@eagerled.com

Address: Building C, Zhongyu High-Tech Industrial Park, Heshuikou, Matian, Guangming, Shenzhen, China

| Electricity Parameter | |
|------------------------------|--|
| Optical Ratings | |
| Brightness | ≥5,000 cd/m ² |
| Viewing Angle | 140°(Horizontal); 140°(Vertical) |
| Best Viewing Distance | ≥3m |
| Gray Grade | 14 bits |
| Display Color | 4.4 trillion colors |
| Brightness Adjustment | 100 grades by software or automatically by sensor |
| Operation Power | AC100-240V 50-60Hz Switchable |
| Max. Power Consumption | 786 W/m ² |
| Avg. Power Consumption | 262 W/m ² |
| Control System | |
| Frame Frequency | ≥60Hz |
| Refresh Frequency | 1920Hz / 3840Hz |
| Input Signal | Composite Video, S-video, DVI, HDMI, SDI, HD-SDI |
| Control Distance | 100M (Ethernet cable); 20KM (Optical fiber cable) |
| Support VGA Mode | 800*600, 1024*768, 1280*1024, 1600*1200 |
| Color Temperature | 5000—9300 adjustable |
| Brightness Correction | Pixel by pixel, module by module, cabinet by cabinet |
| Reliability | |
| Working Temperature | -20~+60 °C |
| Storage Temperature | -30~+70 °C |
| Working Humidity | 10%~90% RH |
| Lifetime | 100,000 hours |
| MTBF | 5000 hours |
| Continuous Operating Time | ≥72 hours |
| Protection Grade | IP65(front), IP54(rear) |
| Out-of-Control Pixel Rate | ≤0.01% |
| Cabinet Details | |
| | |







Package

