## SC-12 sending card box

Version	Time	Description	Draft
V1.0	2017.9.4		ZZH,SR




## **1. Product Feature**

- 12 bit PCI slot+ 12 bit PCI-E slot, compatible with all types of LED sending card.
- Unified power supply, which is convenient for installation management and make the sending card back-up at the same time during application.
- Connected with VDWALL video splicer, which widely used in big screen splicing situation.
- Compatible with all kinds of full color synchronous control system.

## 2. Specification

Whole machine			
Sending Card Specification	Related with selected sending card module		
Input Voltage	100-240VAC 50/60Hz		
Max Power Consumption	≤72W		
Environmental Temperature	<b>0-45</b> ℃		
Environmental Humidity	15-85%		
Size(package)	482.6mm (Height) ×236mm (Width) ×133.5mm (Length)		
Weight	Weight: 5.0 Kg		

## 3. Connection Diagram

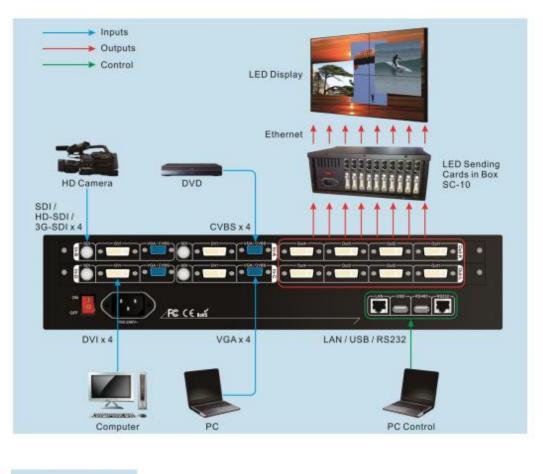





LED sending card Box SC-12

4. Product Dimension