

# VSP 5360


## Seamless Presentation Switching and Scaling



### Key Features

- 4 System Modes
- Visual Effects
- Scale, Crop, Zoom and Position
- Scale Pixel-by-Pixel
- Multilayer Presentations
- DSK/Chroma Key
- Rotation and Flip
- LOGO Capture
- Custom Format
- Configure EDID
- Grayscale Processing
- Apps and Remote Control

### Dimensions

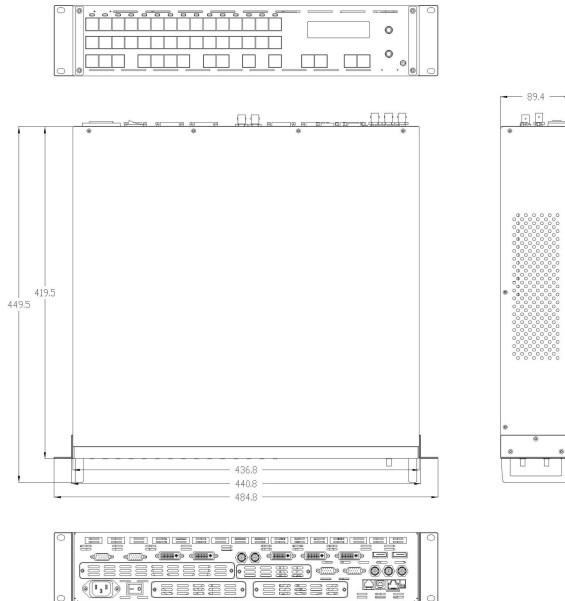


### Specification

Connectors	Inputs	3 × CVBS 2 × DisplayPort 2 × VGA 3 × DVI 1 × SDI (with loop) 2 × SDI (each with loop) — SDI Optional Module 1 × DP (with loop) + HDMI — 4K DP&HDMI Optional Module 2 × CVBS/USB/VGA/HDMI/DVI — CVBS/USB/VGA/HDMI/DVI Optional Module
	Outputs	2 × DVI 2 × VGA
	Communication	LAN TCP/IP USB 2.0 Serial RS232
Performance	Input Resolution	SDI: 625@25/50 PAL   525@29.97/59.94 NTSC   480i@60   576i@50   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60   1080psf@23.98/24/25/29.97/30 VGA: 800x600@60   1024x768@60   1280x1024@60   1440x900@60   1600x1200@60 DVI&HDMI: SMPT: 625@25/50 PAL   525@29.97/59.94 NTSC   720p@50/59.94/60   1080p@50/59.94/60   1080i@50/59.94/60 VESA: 800x600@60   1024x768@60   1280x768@60   1280x1024@60   1600x1200@60   1920x1080@60 DP: 1920x1200@60   2560x1600@60   3840x2160@30 4K: SMPT: 625/25/50 PAL   525/29.97/59.94 NTSC   1080P50/59.94/60   1080i50/59.94/60   720p50/59.94/60 VESA: 3840x2160x24   3840x2160x25   3840x2160x30
	Output Resolution	Select from standard set or select user configurable SMPT: 625@25/50 PAL   525@29.97/59.94 NTSC   480i@60   576i@50   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60   1080psf@23.98/24/25/29.97/30   1280x720@23.98/24/25/29.97/30   1920x1080@23.98/24/25/29.97/30 VESA: 1024x768@60/75/85 ~ 3840x670@60 *Not all resolutions supported on VGA
	Supported Standards	SMPTE 425M (Level A)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C DVB-ASI VGA: VGA-UXGA HDMI: 1.3, 1.4 CVBS: PAL, NTSC DVI: 1.0 DisplayPort: 1.0, 1.2
Features	Output Channels	2
	Layers	4
	DSK / Chroma Key	Yes
	Display Control	Scale, Zoom, Crop, Position, Mask
	Visual Effects	Brightness, Sharpness, Contrast, Saturation, Color Adjustment
	Transitions	Fade, Cut
	Frame Delay	4 frames
Power	4Kx2K Input	Optional Module (DisplayPort 1.2 or HDMI 1.4)
	Input Voltage	AC 85~264V 50/60Hz
	Max Power	45W
Environment	Temperature	0°C~45°C
	Humidity	10%~85%
Physical	Weight	8.1kg (Net Weight) 12.7kg (Package Weight)
	Dimensions	485mm x 450mm x 89mm (Device Dimension)
		630mm x 585mm x 250mm (Package Dimension)

### Order Codes

Product Code	Item
100-5360-01-0	VSP 5360
190-0628-01-0	Dual CVBS Input Module
190-0628-02-0	Dual USB Input Module
190-0628-03-0	Dual VGA Input Module
190-0628-04-0	Dual HDMI Input Module
190-0628-05-0	Dual DVI Input Module
190-0628-06-0	Dual SDI Input/Loop Module
190-0628-07-0	4K Display Port & HDMI Input Module

### Application

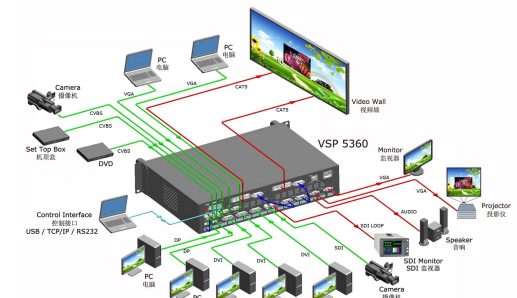

Tel: +86-592-5771197 Fax: +86-592-5788216

E-mail: sales@rgblink.com http://www.rgblink.com

Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial Development Zone, Xiamen, Fujian Province, P.R.C

Specifications are correct at time of printing and subject to change or alteration without notice.

